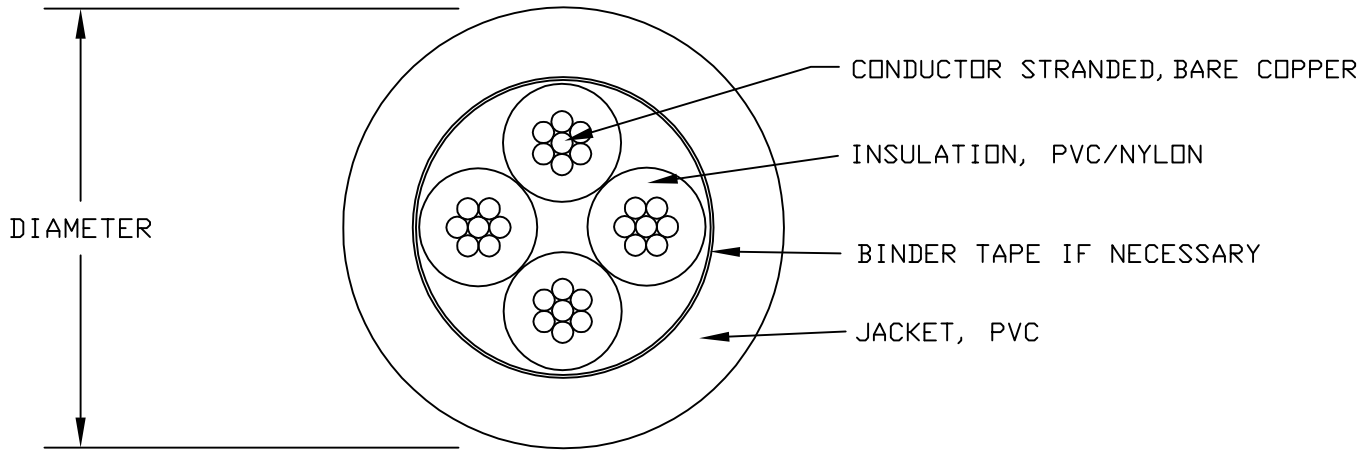


COMPONENT I -	CONDUCTOR: #10AWG 7/.0385 BARE COPPER PER ASTM B3, B8 INSULATION: PVC/NYLON - .026" (0.66 mm) WALL DIAMETER: 0.164" (4.17 mm) NOMINAL
CABLE -	FOUR (4) COMPONENT I ITEMS CABLED WITH A L.H. LAY AND A BINDER TAPE IF NECESSARY
JACKET -	PVC (BLACK): 0.045" (1.14 mm) WALL
JACKET PRINT -	"GENERAL CABLE® (WC) VNTC 4/C 10AWG (UL) TYPE TC-ER THHN/THWN CDRS DIR BUR SUN RES 600V DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK"
RATINGS -	(UL) TYPE TC-ER 600V, THHN/THWN CONDUCTORS
DIAMETER -	0.495" (12.57 mm) NOMINAL
NET CABLE WGT -	200 LBS/1000' (298 KG/KM)
COLOR CODE -	ICEA Method 1, Table E1

REVISIONS

1	1/3/12	DRAWING NUMBER
0	11/29/11	FIRST ISSUE

REFERENCES

10/4 VNTC (THHN/PVC) 600V E1
GCC P/N 286360

General Cable
The Power of ONE
1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-2746

DRAWN BY: A. ZAIDI | APPROVED BY:

THIS DRAWING IS THE PROPERTY OF General Cable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF THE General Cable CO