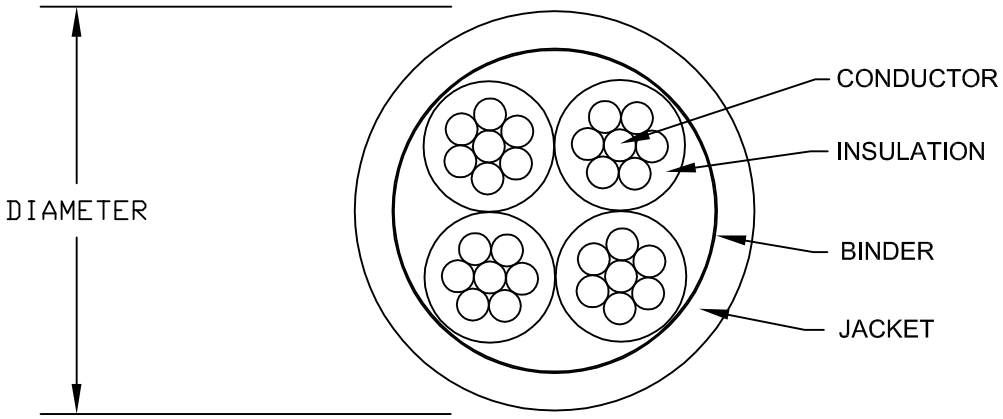


COMPONENT I -	CONDUCTOR: #12AWG (7/.0305) Bare Copper Per ASTM B3, B8 INSULATION: 0.020" PVC/Nylon DIAMETER: 0.130" Nominal
CABLE -	Four (4) Component I Items Cabled Together with a Left Hand Lay and Binder
JACKET -	0.045" PVC (Black)
DIAMETER -	0.405" Nominal
NET CABLE WGT -	130 Lbs/1000' Nominal
JACKET PRINT -	"GENERAL CABLE® (WC) VNTC 4/C 12AWG (UL) TYPE TC-ER THHN/THWN CDRS DIR BUR SUN RES 600V ROHS DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE"
RATINGS -	(UL) Type TC-ER 600V, THHN/THWN Conductors
COLOR CODE -	Method 1 Table E1 with Alpha-Numeric Print

REVISIONS

1	08/31/12	Changed color code wording
0	06/23/09	FIRST ISSUE

REFERENCES

12/4 VNTC (THHN/PVC) 600V E1

GCC P/N: 264510

General Cable

The Power of ONE

1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: 02-1905

DRAWN BY: CAD

APPROVED BY: A. FILION

THIS DRAWING IS THE PROPERTY OF GENERAL CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF THE GENERAL CABLE CO